

# DXT Series

10 to 1125 HP  
(39 to 1250A)


Advanced Digital  
Soft Starter



Medium voltage features  
in a low voltage starter design

by MOTORTRONICS

# The DXT Series Ratings

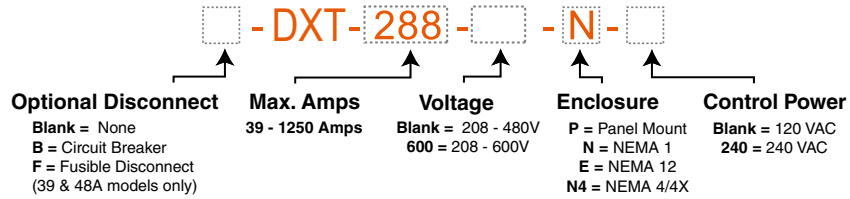

Model Number	MAX AMPS	Horsepower				KW	
		208V	240V	480V	600V	230V	400V
DXT-39*	39	10	-	25	30	11	18.5
DXT-48	48	10	15	30	40	-	22
DXT-62	62	15	20	40	50	15	30
DXT-78	78	20	25	50	60	22	37
DXT-92	92	25	30	60	75	-	45
DXT-120	120	30	40	75	100	30	55
DXT-150	150	40	50	100	125	45	75
DXT-180	180	50	60	125	150	55	90
DXT-220	220	60	75	150	200	-	110
DXT-288	288	75	100	200	250	75	132
DXT-360	360	100	125	250	300	110	160
DXT-414	414	125	150	300	350	-	200
DXT-476	476	-	-	350	400	132	250
DXT-550	550	150	200	400	500	160	-
DXT-718	718	200	250	500	600	200	315
DXT-862	862	250	300	600	700	-	400
DXT-1006	1006	300	350	700	800		550
DXT-1150	1150	350	400	800	900		637
DXT-1200	1200	400	450	900	1000		665
DXT-1250	1250	450	500	1000	1125		700